



MIX MINI POWER AMPLIFIER SPA 1060



ATTENTION


In order to avoid get an electric shock, please don't open the case by yourself. When a fault occurs, please find the dealer or the produce company provide service for you or sent it to the professional department for repair. Please don't open the case if not professional person, it's dangerous for your life safety.

INSTALLATION GUIDE

Specialty,

- 1 Player has 2 ways for MIC input,2 ways for auxiliary input(users can turn on/of the soures behind the player)
- 2 4-8Ωconstant impedance output,35V,70V,100V constant voltage output.
- 3 Player has preferential for broadcast.
- 4 Output short circuit、overheat、overload protection.

Front Panl

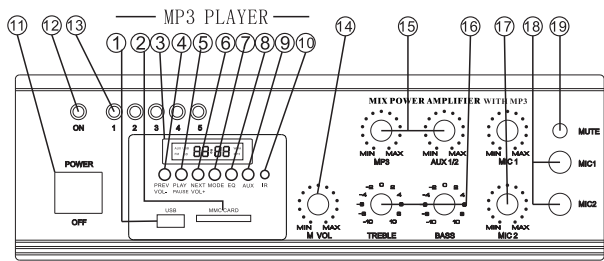

- 1、USB input

2、MMC card input

3、Screen

4、PREV/VOL- Button

5、Play/Pause Button

6、NEXT/VOL+ Button

7、Mode Button
- 8、EQ Buttom

9、AUX input

10、IR

11、Power Switch

12、Power LED

13、Signal Lever Lamp

14、Master Volume
- 15、MP3/AUX Volume

16、Treble/Bass Control

17、MIC1/2 Volume Control


18、MIC1/2 Input

19、Mute Control for MIC1

Note

All of 5 Level Lamps are light means OVERLOAD,users should set the Volume Control to balance.

Back Panel

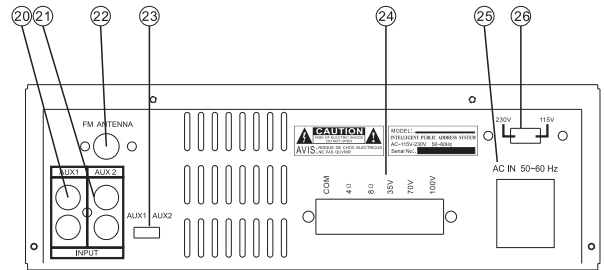

- 20、AUX1 input

21、AUX2 input

22、FM Signal input

23、AUX 1&2 switchover
- 24、Constant Voltage Output

25、AC IN 50-60Hz Power Input

26、Power Input Switchover

Special Function

MIC 1 is the highest signal level for all MIC input.

Installation

- 1.Keep the FAN clear.
- 2.Do not use anymore if the electric wire conduit has broken.
- 3.The equipment is not allowed to put in wet,dust,hith temperature under the sunlight.
- 4.The electric outlet should be connected to ground.
- 5.The electric outlet and power supply outlet should be inosculated.
- 6.When the equipment is in power-up state,users found the POWER LED is light,but no sound output even if check the sound source in the back panel, it means electric outlet error.

Solution cut off the electric power immediately,and check the error includes power input,using environment and etc.

Performance

Model	SPA 1060
Output Watt	60W
Output Method	4-8Ω rated resistance,35V,70V,100V rated voltage output
Accessorial Output	600Ω 1V (0dB)
Input	MIC1/2 ---600Ω2.0-6.0mv. AUX1,2--- 15KΩ350mv (UNBALANCE)
Frequency response	80Hz-16KHz(± 3dB)
THD	Less than 0.1% at 1KHz,1/3 rated power
SNR	Microphone 1,2 and 3:66 dB.Aux1 and 2:7 0dB
volume	BASS ± 10dB at 100Hz TREBLE ± 10dB at 10KHz
Protection	Short circuit for overload,overheat
Special Funtion	MIC 1 is the highest signal level for all input
Power	AC power 115V/230V 50~60Hz
Consumption	90W
SIZE	280×280×80mm
Gross Weight	9.8Kg
Net Weight	8.2Kg