


FEATURES

- ◆ Easy installation
- ◆ To be used with 70v/100v distribution lines.
- ◆ Fit In regular flush mounted boxes
- ◆ 5 (five) programs selector
- ◆ 5 (five) steps attenuator
- ◆ Override function for emergency calls
- ◆ 10W and 30W models available

SPECIFICATIONS

Model N°	LSP 1410	LSP 1430
Output Capacity	10W	30W
Attenuation Method	Resistance	Transformer
Override Switch	24Vdc	24Vdc
Volume Controller	5 steps OFF -15dB, -10dB, -5dB, 0dB	
Audio Selector	5 programs	
Size Plate	120 x 70 mm	(4 3/4" x 2 3/4")
Flush Mounted Box Size (not supplied)	90x50x37mm (3 1/2"x2"x 1 1/2")	90x50x63mm (3 1/2"x2"x 2 1/2")
Gross Weight (g)	190	350
Accessory	M3.5 x 20 Screw Plate	2 1

CONNECTIONS

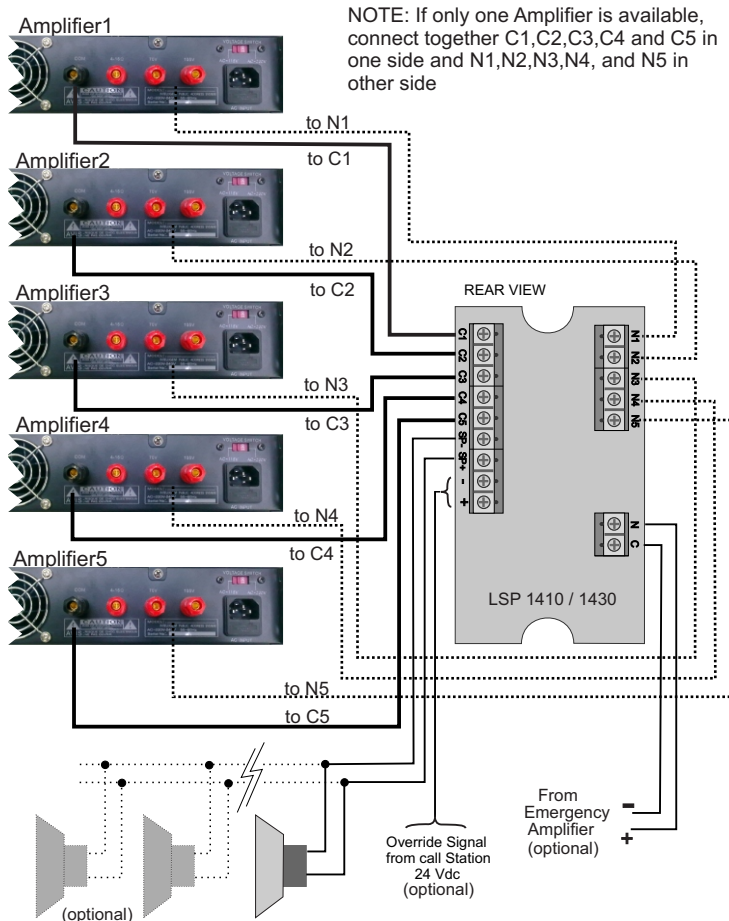

LSP 1410 max 10W LSP 1430 max 30W




Volume Controller



◆ LSP 1410

◆ LSP 1430

INSTALLATION

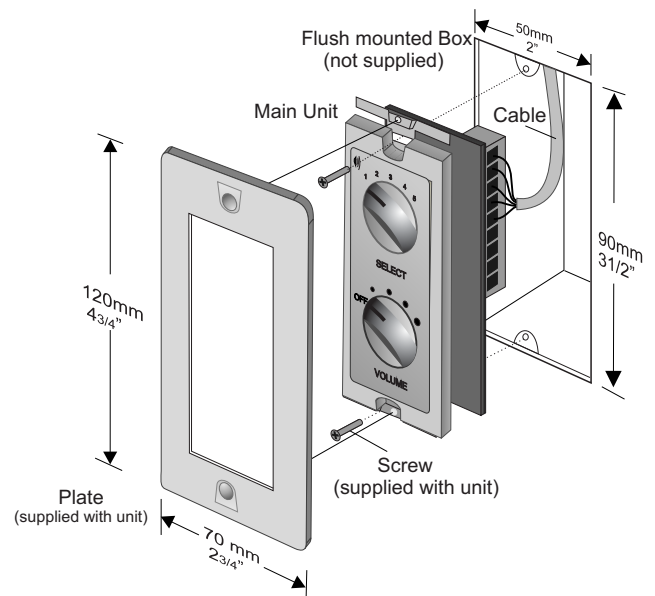

- 1) Connect the Volume Controller to the Cable
- 2) Using the supplied screws, fit the Main Unit in the flush-mounted Box (not supplied)
- 3) Attach the supplied plate to the unit