


FEATURES


- 10 channels input: 5 for MIC input, 3 for AUX input and 2 for emergency input.
- Each channel has its own volume controller, and unified volume controlling is available.
- Forced switching and priority function.
- Has force as first function

FRONT PANEL

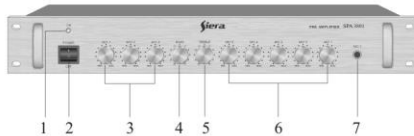

- | | |
|------------------------------|------------------------------------|
| 1 Power LED indicator | 5 Treble control |
| 2 Power switch. | 6 MIC 1, 2, 3, 4, 5 volume control |
| 3 AUX 1, 2, 3 volume control | 7 MIC 1 input |
| 4 Bass control | |

REAR PANEL




- | | |
|-------------------------|----------------------|
| 1 MIC 2, 3, 4, 5 inputs | 4 OUTPUT jacks |
| 2 EMC 1, 2 inputs | 5 AC power connector |
| 3 AUX 1, 2, 3 inputs | |

MUTING FUNCTION

The MIC input 2, 3, 4, 5 and AUX input 1, 2, 3 automatically muted by EMC input 1, 2. (EMC 1 or 2 input overrides the MIC 1, 2, 3, 4 and AUX 1, 2, 3 signals).

The MIC input 2, 3, 4, 5 AUX input 1, 2, 3 and EMC 1, 2 are automatically muted by MIC input 1 (MIC 1 input overrides the other input signals).

CONNECTIONS

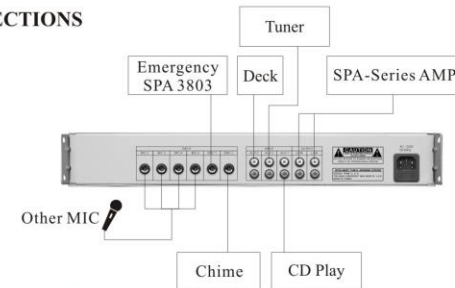

SPECIFICATIONS

Inputs	MIC 1,2,3,4,5: 600 Ω 1.8mv unbalanced AUX 1,2,3: 10K Ω 200mv unbalanced
Output	600 Ω 1V 0dBV
Frequency response	80Hz-16KHz
Signal/noise ratio	MIC input: 80dB AUX input: 85dB
Tone	Bas : ± 10 dB at 100Hz Treble: ± 10 dB at 15kHz
Protection	AC fuse $\times 1$
Power Requirement	AC 220V-240V / 50Hz-60Hz
Dimensions	484 \times 66 \times 410mm
Gross weight	7.2kg
Net weight	6kg