

**Proximity RFID Card Reader**  
**SAC 3540**



# Please read the manual carefully before using the device

## 1.Features


- Plastic case
- Very low power consumption, standby current less than 30mA
- Wiegand 26 output
- Fast Search speed: time between reading card and opening the door is less than 0.1S

## 2. Specifications

Operating Voltage	9-12V DC
Card type	EM
Reading Distance	6 cm
Idle Current	≤30mA
Operating Temperature	-45°C~60°C
Operating Humidity	10%- 90% RH
Waterproof	IP68
Dimension	110*48*20 MM

## 3. Installation

- Drill the holes on the wall according to the hole size of the back cover or install the cable box on the wall.  
And Fix the back cover firmly on the wall with the supplied screws. (Picture below)

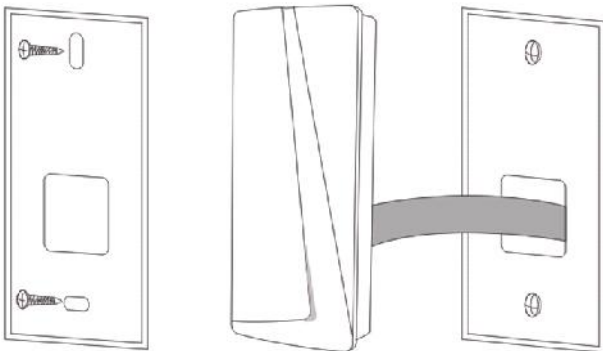


- Thread the cable through the cable hole, connect the wire needed, wrap unused wire with insulating tape in case of short circuit
- Fix the front cover to the back cover with screw driver

## 4.Wiring

Wire No.	Function	Color	Description
1	LED	Blue	Connect controller LED
2	Beeper	Yellow	Connect controller beeper
3	D0	Green	WG output line D0
4	D1	White	WG output line D1
5	+12V	Red	Power supply +12V
6	GND	Black	Power supply -12V

## 5.Wiring Diagram

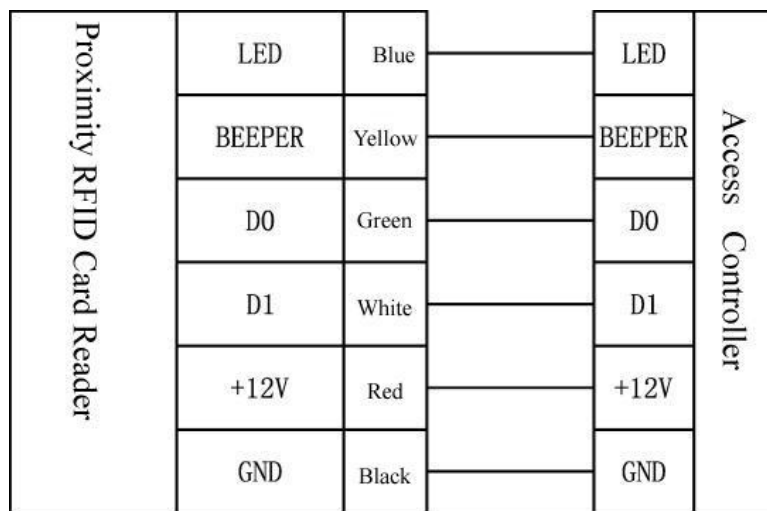

## 6.Packing List

Name	Model	Quantity	Remarks
RFID Reader	SAC 3540	1	
Rubber plug		2	Φ6mm×30 mm, used for fixing
Self tapping screws		2	Φ4mm×28 mm, used for fixing

### Warm Tips:

Please ensure that all the above contents are correct. If any are missing, please notify the supplier of the device.

If any update, please forgive us without notice.