

SAC 3604V2

CleverAccess Face and Fingerprint Reader for Access Control and Time Attendance



- · Access Control + Time Attendance
- <1 sec fingerprint</p> recognition speed
- · Facial, Fingerprint, ID card and Password access
- · 1000 Faces
- · 5000 Fingerprint
- · IR Leds for face recognition at night














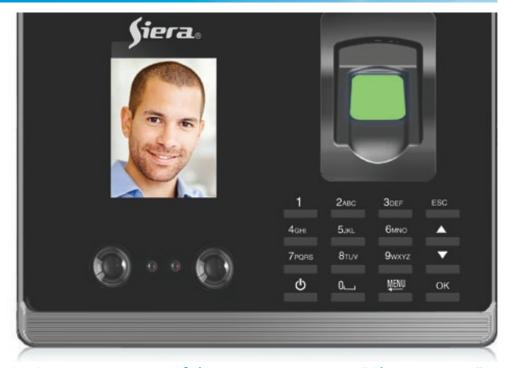

SAC 3604v2 is part of the new generation "CleverAccess" for Time attendance and Access Control, with face and fingerprint recognition. Designed with the most advanced and fastest facial and fingerprint algorithm, to get the most reliable and accuracy access.

32bit CPU **Fingerprint Sensor:** Optical Sensor **USB Port:** Yes

Built-IN card reader: EM 125 khz 2.4" LCD I CD: Keyboard: 16 keys Communication interface: TCP / IP

Relay output: Lock IR Leds: two IR leds for face detection at night

Voice: **Real Time Clock:** supported

Operating Voltage: DC 12V \pm 5% (current : below 0.7A)

Humidity: 20% ~ 80% -10°C ~ 60°C Temperature: **Face Capacity:** 1000 **Fingerprint Capacity:** 5000

Identify mode: Face / Fingerprint / card / password

Bell: USB port / download (enroll data, log):

Real-time event: Send events to sever with UDP communication.

Fingerprint Engine Version: V3.0 FAR/ FRR 0.00001/ 0.1(%)

Speed: ≤1.0 second Allowable finger rotation: Intelligent 360° (all direction) adaptation function: Supported FP recognition mode:

V2.0 FAR/ FRR 0.001/ 1(%) Face Engine version:

Identify speed: ≤1.5 second Intelligent adaptation function: Face Supported recognition mode: 1:N