


# SAC 3714 3-M

Cleveraccess Face And Fingerprint Reader  
For Access Control And Time Attendance

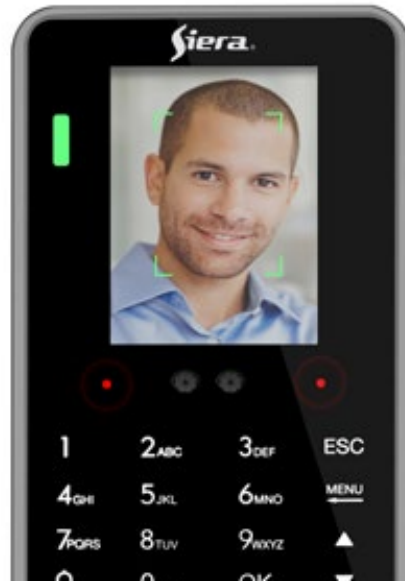

- Access Control + Time Attendance
- <1 sec fingerprint recognition speed
- Facial, Fingerprint, ID card an Password access
- 3000 Faces
- 3000 Fingerprint
- IR Leds for face recognition at night
- Duress Password

*SAC 3714 3-M is part of the new generation "CleverAccess" for Time attendance and Access Control, with face and fingerprint recognition. Designed with the most advanced and fastest facial an fingerprint algorithm, to get the most reliable and accurancy access.*

Data subject to change without prior notice



<b>System</b>	LINUX
<b>FLASH</b>	128MB
<b>Camera</b>	30W pixels
<b>Display</b>	2.4 inch TFT LCD screen
<b>Keyboard</b>	4x4 touch keys
<b>Anti-tamper button</b>	YES
<b>One click to clear administrator</b>	YES
<b>Reset button</b>	YES
<b>Fingerprint head Ultra</b>	optical fingerprint head
<b>Card Type</b>	EM ( Mifare optional )
<b>Authentication method:</b>	face, fingerprint, password, card
<b>User capacity</b>	3000
<b>Face capacity</b>	3000
<b>Fingerprint capacity</b>	3000
<b>Card capacity</b>	3000
<b>Record capacity</b>	200000
<b>Voice</b>	Yes
<b>Language</b>	Multi Language
<b>Access control interface</b>	NO/CN output, door open button input, WG26/34 input output, fire alarm input, door magnetic input, alarm output, RS485 input, doorbell output
<b>Communication method</b>	Standard :TCP/IP, USB cable ,USB flash disk ,WiFi ( Optional )
<b>Input power</b>	12V/1A